

Connecting the Aastra DHSG Cable

The enclosed cable is required to support DHSG compatible headsets on Aastra 6753i, 6755i, 6757i, and 6757i CT IP Phones.

The Aastra DHSG Cable and RJ45 Coupler are used to connect your Aastra IP Phone to a DHSG compatible cordless headset using the existing headset and expansion module ports on the phone. Care must be taken in attaching the cable correctly or you may damage your Aastra IP Phone.



WARNING

Only the Aastra DHSG cable should be connected directly to the back of your phone. This cable cannot be used in conjunction with an expansion module. No 3rd party DHSG cables should be connected directly to the Aastra IP phone.

Any damage caused by connecting a 3rd party DHSG headset cable directly to your phone will void your warranty with Aastra Telecom.

Aastra Verified Headsets

Aastra's DHSG headset support has been tested and verified with the following products:

- GN Netcom GN 9350, GN 9350e, GN 9120, GN 9125. All require the GN 14201-10 cable.
- Plantronics CS60, CS70N, CS351N, and Voyager 510S. All require the APS-1 cable.
- Sennheiser BW900. Requires the TCI01 adapter box.

Use of a non-verified DHSG headset solution is at the customer's own discretion and the customer should be aware that some DHSG headsets require an optional cable in order to be electrically DHSG compliant. Aastra is not responsible for any damage to the IP phone or headset that may result from the use of non-verified headsets, or from incorrectly connecting headsets or cables.

Connection Instructions


To safely install your DHSG compatible headset for use with your Aastra IP phone do the following:

1. Locate the Aastra Telecom DHSG cable.


Note: The cable is packaged with a small RJ45 cable coupler. Make sure you have the Aastra cable before continuing.

2. On the back of your Aastra IP phone connect the two top ends of the "Y" cable as follows:


- A. Connect the **yellow** connector to the expansion module port and route the cable through the slot on the back of the phone as shown.



- B. Connect the **green** connector to the headset port, and route the cable through the slot on the back of the phone as shown.

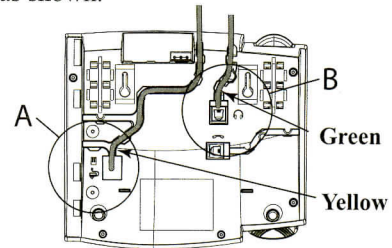

3. Connect the RJ45 Coupler to the remaining **blue** end of the Aastra cable.

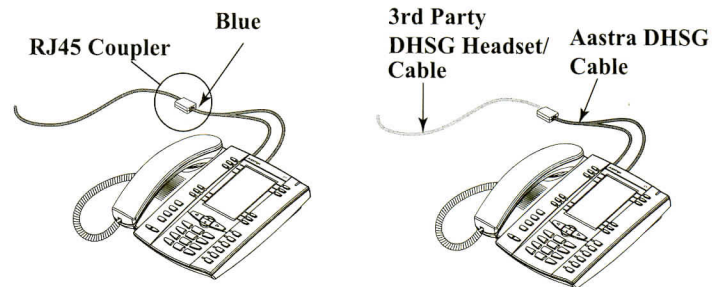

4. Connect the cable from your DHSG headset base unit to the other side of the RJ45 Coupler, and follow the installation instructions provided with your DHSG headset.
5. Set the Audio Mode to Headset/Speaker on your phone. (Options->Preferences->Set Audio->Audio Mode->Headset/Speaker).
6. For full headset functionality, disable the "Goodbye Key Cancels Incoming Call" parameter. (Aastra Web UI, Basic Settings->Preferences->General)

Note: DHSG headsets may require further configuration before use, such as changing dip switch settings. Refer to your headset documentation or contact your headset vendor for more information.